


Fig. 5.

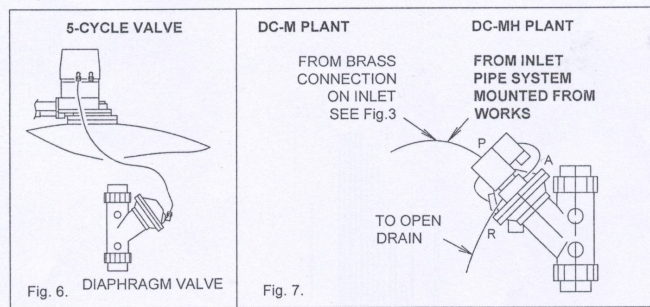

## INSTALLATION OF DC-MH/CSC 2

### RESIN TANKS

- Slide the resin tanks into position at the installation site and level the tanks by means of the supplied three levelling legs per tank.
- Install the supplied pipe system with assembled back plate and plug the hole to the left on the back of the five-cycle valve (seen from the back) using a PVC plug with O-ring. Put the supplied O-rings (one big and one small) on the pipe system adapters and press them into the back of the valves. Put the bolts through the back plate and tighten them.